

workmanship of highest quality








www.brancley.com



INTRODUCTION

Behind every successful enterprise, there are people with innovative spirits, conviction and courage. Brancley is no different. It is run by the people who are trend setters in their respective fields. We believe that flawless product of high quality can be manufactured by the apt combination of human intelligence and mechanical efficiency. For total quality control, We utilizes in house facilities such as R&D lab, Tool Room Design Studio and state of art modern machinery. We do continuous improvements in quality of product, people and the environment within the organization. Our approach towards business is proactive and to uphold the integrity and business ethics. Through our unique design, appropriate material selection and innovative production techniques we manufacture high quality aluminium ladders, floor drains and other stainless steel, aluminium products. which are easy to handle and versatile in use.



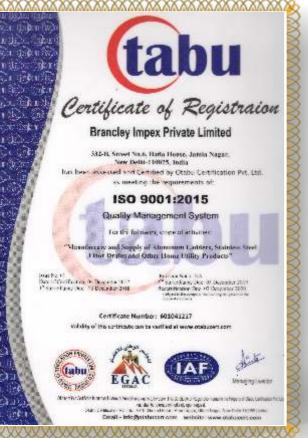



MODEL : **BDPL** STYLE : **DUAL PURPOSE LADDER** Load Capacity 150 kg.

MODEL	HEI OF LA in FT/	Open Size (AXB)	
No.	Before(L) extension	After extension	(mm)
BDPL - 03	3ft(0.9mtr)		385 x 560
BDPL - 04	4ft(1.20mtr)		420 x 745
BDPL - 05	5ft(1.50mtr)	9ft(2.7mtr)	460 x 975
BDPL - 06	6ft(1.80mtr)	11ft(3.30mtr)	500 x 1175
BDPL - 07	7ft(2.10mtr)	13ft(3.90mtr)	541 x 1360
BDPL - 08	8ft(2.40mtr)	15ft(4.50mtr)	577 x 1552
BDPL - 09	9ft(2.70mtr)	17ft(5.1mtr)	620 x 1754
BDPL - 10	10ft(3.0mtr)	19ft(5.70mtr)	659 x 1940
BDPL - 12	12ft(3.6mtr)		753 x 2370
BDPL - 14	14ft(4.2mtr)		810 x 2760
BDPL - 17	17ft(5.2mtr)		935 x 3478

Technical Features :

- Ladders made from high grade extruded aluminium that gives more strength, rigidity and high corrosion resistance.
- Top and bottom steps are knee braced to increase the resistance to avoid the damages due to dynamic drop. High grade slip resistant foot pad.
- Slip resistant traction tread steps.
- Rigid, Sturdy & Slim in Look with exceptionally strong structure.

USAGE :

- Maintenance of street Lighting
- Construction job sites.
- For Painting and decorating the building.
- Electro Mechanical works.
- Shopping Mall.



After Extension



HEAVY DUTY STRAIGHT LADDER

MODEL : BHSL

STYLE : SINGLE STRAIGHT LADDER

(C-SECTION WITH ROUND RUNG) Load Capacity 150 kg.

MODEL	LEN	GTH
No.	Feet	Meter
BHSL 07	6.6	1.9
BHSL 09	8.3	2.4
BHSL 11	10.0	3.0
BHSL 14	12.5	3.7
BHSL 16	14.0	4.2
BHSL 18	16.0	4.8
BHSL 23	20.0	6.0

HEAVY DUTY EXTENSION LADDER

MODEL : BHEL

STYLE : DOUBLE EXTENSION LADDER

(C-SECTION)


Load Capacity 150 kg.

MODEL	CLOSED LENGTH		EXTENDED LENGT	
No.	Feet	Meter	Feet	Meter
BHEL 07	6.6	1.9	10.6	3.2
BHEL 09	8.3	2.4	14.0	4.2
BHEL 11	10.0	3.0	17.0	5.1
BHEL 14	12.5	3.7	21.0	6.3
BHEL 16	14.0	4.2	24.3	7.3
BHEL 18	16.0	4.8	28.3	8.5
BHEL 23	20.0	6.0	36.3	10.9

USAGE:

- Maximum Security.
- Easy Handling.
- Maintenance of street Lighting.
- Construction job sites.
- Electro Mechanical works.
- Shopping Mall.
- Comfort in use.



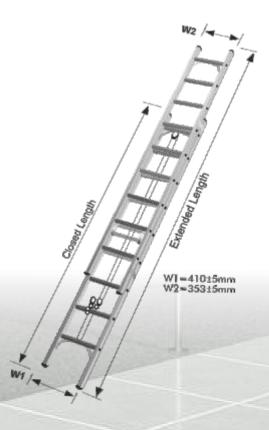



MODEL : **BSL** STYLE : **BRANCLEY STEP LADDER** Load Capacity 150 kg.

MODEL No.	Total Height (Inch)	Platform Height (Inch)
BSL - 03	47	25
BSL - 04	57	34
BSL - 05	67	43
BSL - 06	77	52
BSL - 07	87	61
BSL - 08	97	70
BSL - 09	107	79
BSL - 10	117	88

Technical Features :

- High grade extruded aluminium alloy for more strength, rigidity and high corrosion resistance.
- High grade slip resistant foot pads.
- Rigid, sturdy & light weight with exceptionally strong structure for bearing human load upto 150 kgs.

MODEL : **BCL** STYLE : **BRANCLEY COMFY LADDER** Load Capacity 150 kg.

MODEL	Total	Platform
No.	Height (Inch)	Height (Inch)
BCL - 04	56	36
BCL - 05	66	46
BCL - 06	76	56
BCL - 07	86	66

Technical Features:

- High grade extruded aluminium alloy for more strength, rigidity and high corrosion resistance.
- High grade slip resistant foot pads.
- Rigid, sturdy & light weight with exceptionally strong structure for bearing human load upto 150 kgs.
- Easy and safe to climb with the support of side railings.



USAGE:

Domestic purpose / Factroy Facilities / Construction & building maintenance site / Departmental stores



FIBRE GLASS STEP LADDER

- Non-conductive fibreglass stiles, ideal for working around electricity for home and industrial use
- Integrated tool tray for holding tools whilst you work
- High grade of FRP makes it more rigid and stable & 150kg load capacity suitable for heavy trade use
- Solid aluminium rivets provide rigid fixing
- Non Conductive ladder and also fire resistance, Corrosion & Water Resistant
- Available in 3 feet to 12 feet
- ERDA certified ladders
- Comes with a 1 year warranty for Manufacturers defects



STRAIGHT STEP LADDER

Load Capacity 150 kg.

HEIGHT (Feet)
6
7
8
9
10

USAGE :

- Maximum Security.
- Easy Handling,
- Maintenance of street Lighting.
- Construction job sites.
- Electro Mechanical works.
- Shopping Mall.
- Comfort in use.



Fiber Glass Ladder



MODEL : BMPL

STYLE : BRANCLEY MULTI PURPOSE LADDER

Load Capacity 150 kg.

Description:

The multi purpose Ladder is a compact four section folding ladder, Which can be used in upto four configurations, plus a workbench. When foded it measures just 940mm x 350mm x 255 mm and will fit easily into a car bood.

Technical Features:

Four section hinged ladder. Square rungs and box - section style gives exceptional strength and rigidity. Large click - stopped hinges ensure a safe, positive lock in each position.

Multi purpose Mode:

- Step Ladder Stairway ladder.
- Leaning ladder with standoff.
- Leaning ladder Workbench



MODEL : BRANCLEY TELESCOPIC LADDER

STYLE : SINGLE TELESCOPIC LADDER

Load Capacity 150 kg.

Technical Features:

- Ideal For Cleaning Windows, Interior & Exterior Painting & Decorations, All Other House Hold Works & Office Works.
- Super Quality Alloy Aluminium Built Ladder. Non-Slip Rubber Angled Feet to Protect Floor Surfaces and Give Great Grip in All Positions. Anti-Skid PVC Shoes for Added Safety.
- Foldable easaly portable & occoupy less storage space.
- Available in 3.2, 3.8 & 4.1 meters





MODEL : BRANCLEY ALUMINIUM SCAFFOLDING STYLE : BRANCLEY INDUSTRIAL SCAFFOLD TOWERS





- Integral with 500mm rung spacing.
- Weight rating 700Kg less tower self weight.
- Available in different working heights from 2 mtr. to 15 meter with two width options of single & double width.
- Fitted with single locking castors individual certified to 700 Kg. static load.
- Frame Section available in 850mm and 1450mm widths and 1m., 1.5m. and 2m. Heights.
- Fully welded Ladder incorporated into frame.
- Tower base plates are available as an alternative.
- Safe working load of 275 kg. per platform.
- · Floating Spigots for easy assembly / dismantling.


Model	Material	Length	Width	Available Height	Castor Wheels
Single Width Tower	Aluminium Alloy	1.8 Mtr.	0.8 Mtr.	2 mtr. to 15 Mtr.	6" Castor Wheels
Double Width Tower	Aluminium Alloy	1.8 Mtr.	1.4 Mtr.	2 mtr. to 15 Mtr.	6" Castor Wheels


FLOOR DRAINS




FD 011: Floor Drain with Removable Grid & securing Screws with Cover (3 pc set)

Brancley






FD 014: Floor Drain





- Soft design
- 10 years warranty




Model No.	Material	Size	Thickness	Outlet Data	Finish
FD 011	SS 304/316	150x150x110	2 MM	110 MM	Polish
FD 014	SS 304/316	200x200x110	2 MM	110 MM	Polish




FLOOR DRAINS




FD 012: Floor Drain



FD 015: Floor Drain with Removable Grid & securing Screws with Cover (3 pc set)



- Rust resistance
- Soft design
- 10 years warranty



Model No.	Material	Size	Thickness	Outlet Data	Finish
FD 012	SS 304/316	150x150x110	2 MM	110 MM	Polish
FD 015	SS 304/316	200x200x110	2 MM	110 MM	Polish






ø 110 ø 110 150mm


2 mm

FD 016 : Floor Drain - Clean out Floor Drain with removable Cover and Securing Screws





- Soft design
- 10 years warranty



Model No.	Material	Size	Thickness	Outlet Data	Finish
FD 013	SS 304/316	150x150x110	2 MM	110 MM	Polish
FD 016	SS 304/316	200x200x110	2 MM	110 MM	Polish



workmanship of highest quality

BRANCLEY IMPEX PRIVATE LIMITED

G-60, Sarita Vihar-Kalindi Kunj Road, Near Footover Bridge, New Delhi-110025 Tel.: 011-29949465, 9213091796, 9810168933 E-mail : sales@brancley.com, www.brancley.com

Factory:

K-454, Site V, UPSIDC Industrial Area, Kasna, Greater Noida, G.B. Nagar - 201306